
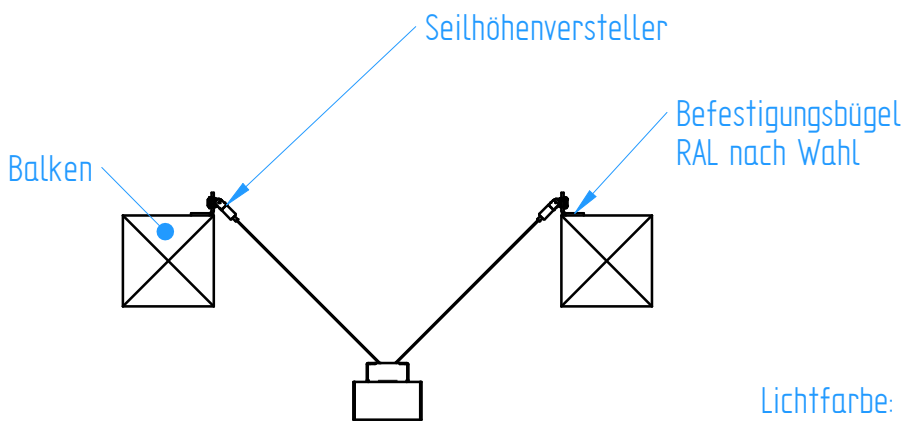


For this drawing, we reserve all rights. They remain our intellectual property and may not be copied or made accessible to third parties without our express permission. Subject to change.

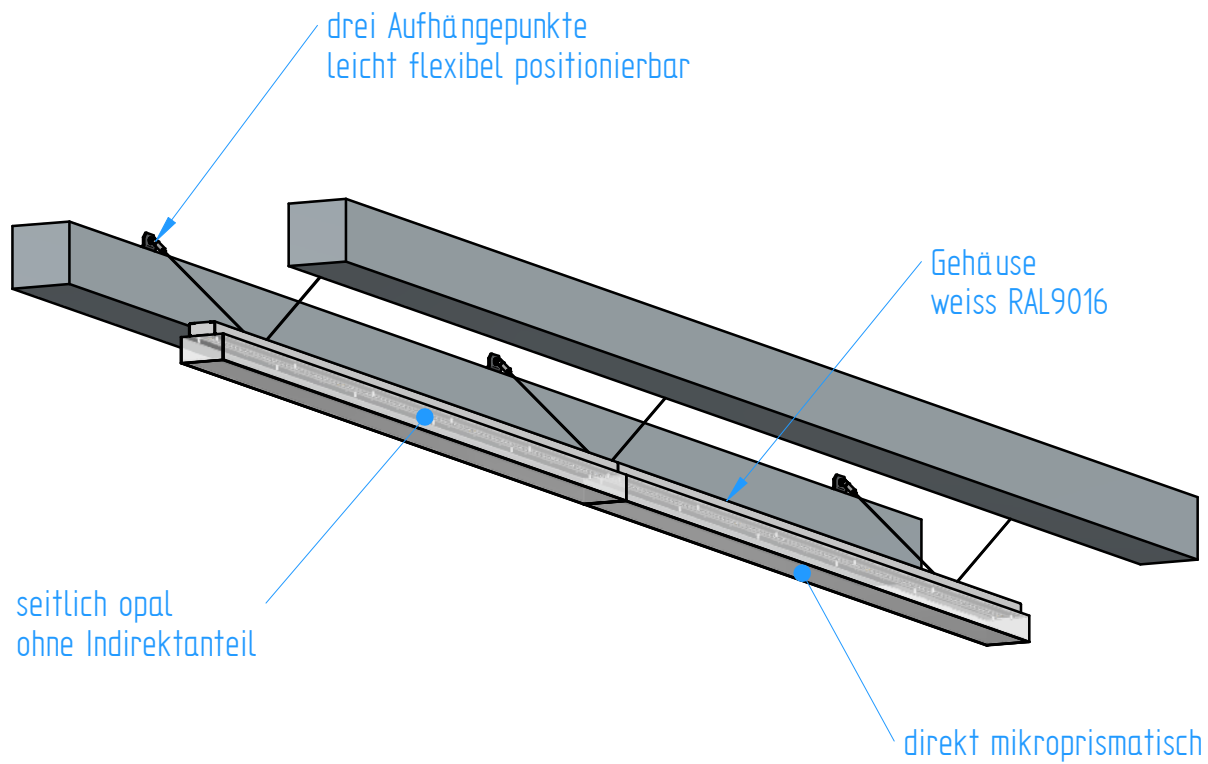

Lichtfarbe: 3500K CR190  
 Lichtstrom: 6500 lm  
 Betriebsart: DALI | 220-240V  
 ca. 50W


**Freigabe:**

Name: \_\_\_\_\_

Datum: \_\_\_\_\_

REV.	DATE	EDITED BY	GENERAL TOLERANCES		FORMAT	PROJECTION	SCALE	DOCUMENT NO
#	24.03.2023	VG	All dimensions are in millimeters acc. to DIN ISO 2768-1 medium acc. to DIN ISO 2768-2 K		A4		1:14.29	114692
A	02.10.2023	VP						
					SHEET	REVISION	TITLE	
					1 OF 2	A	VPS Uni ZH KIR Pos.50.41	
					<b>monolicht</b> <i>creating light</i>			

For this drawing, we reserve all rights. They remain our intellectual property and may not be copied or made accessible to third parties without our express permission. Subject to change.

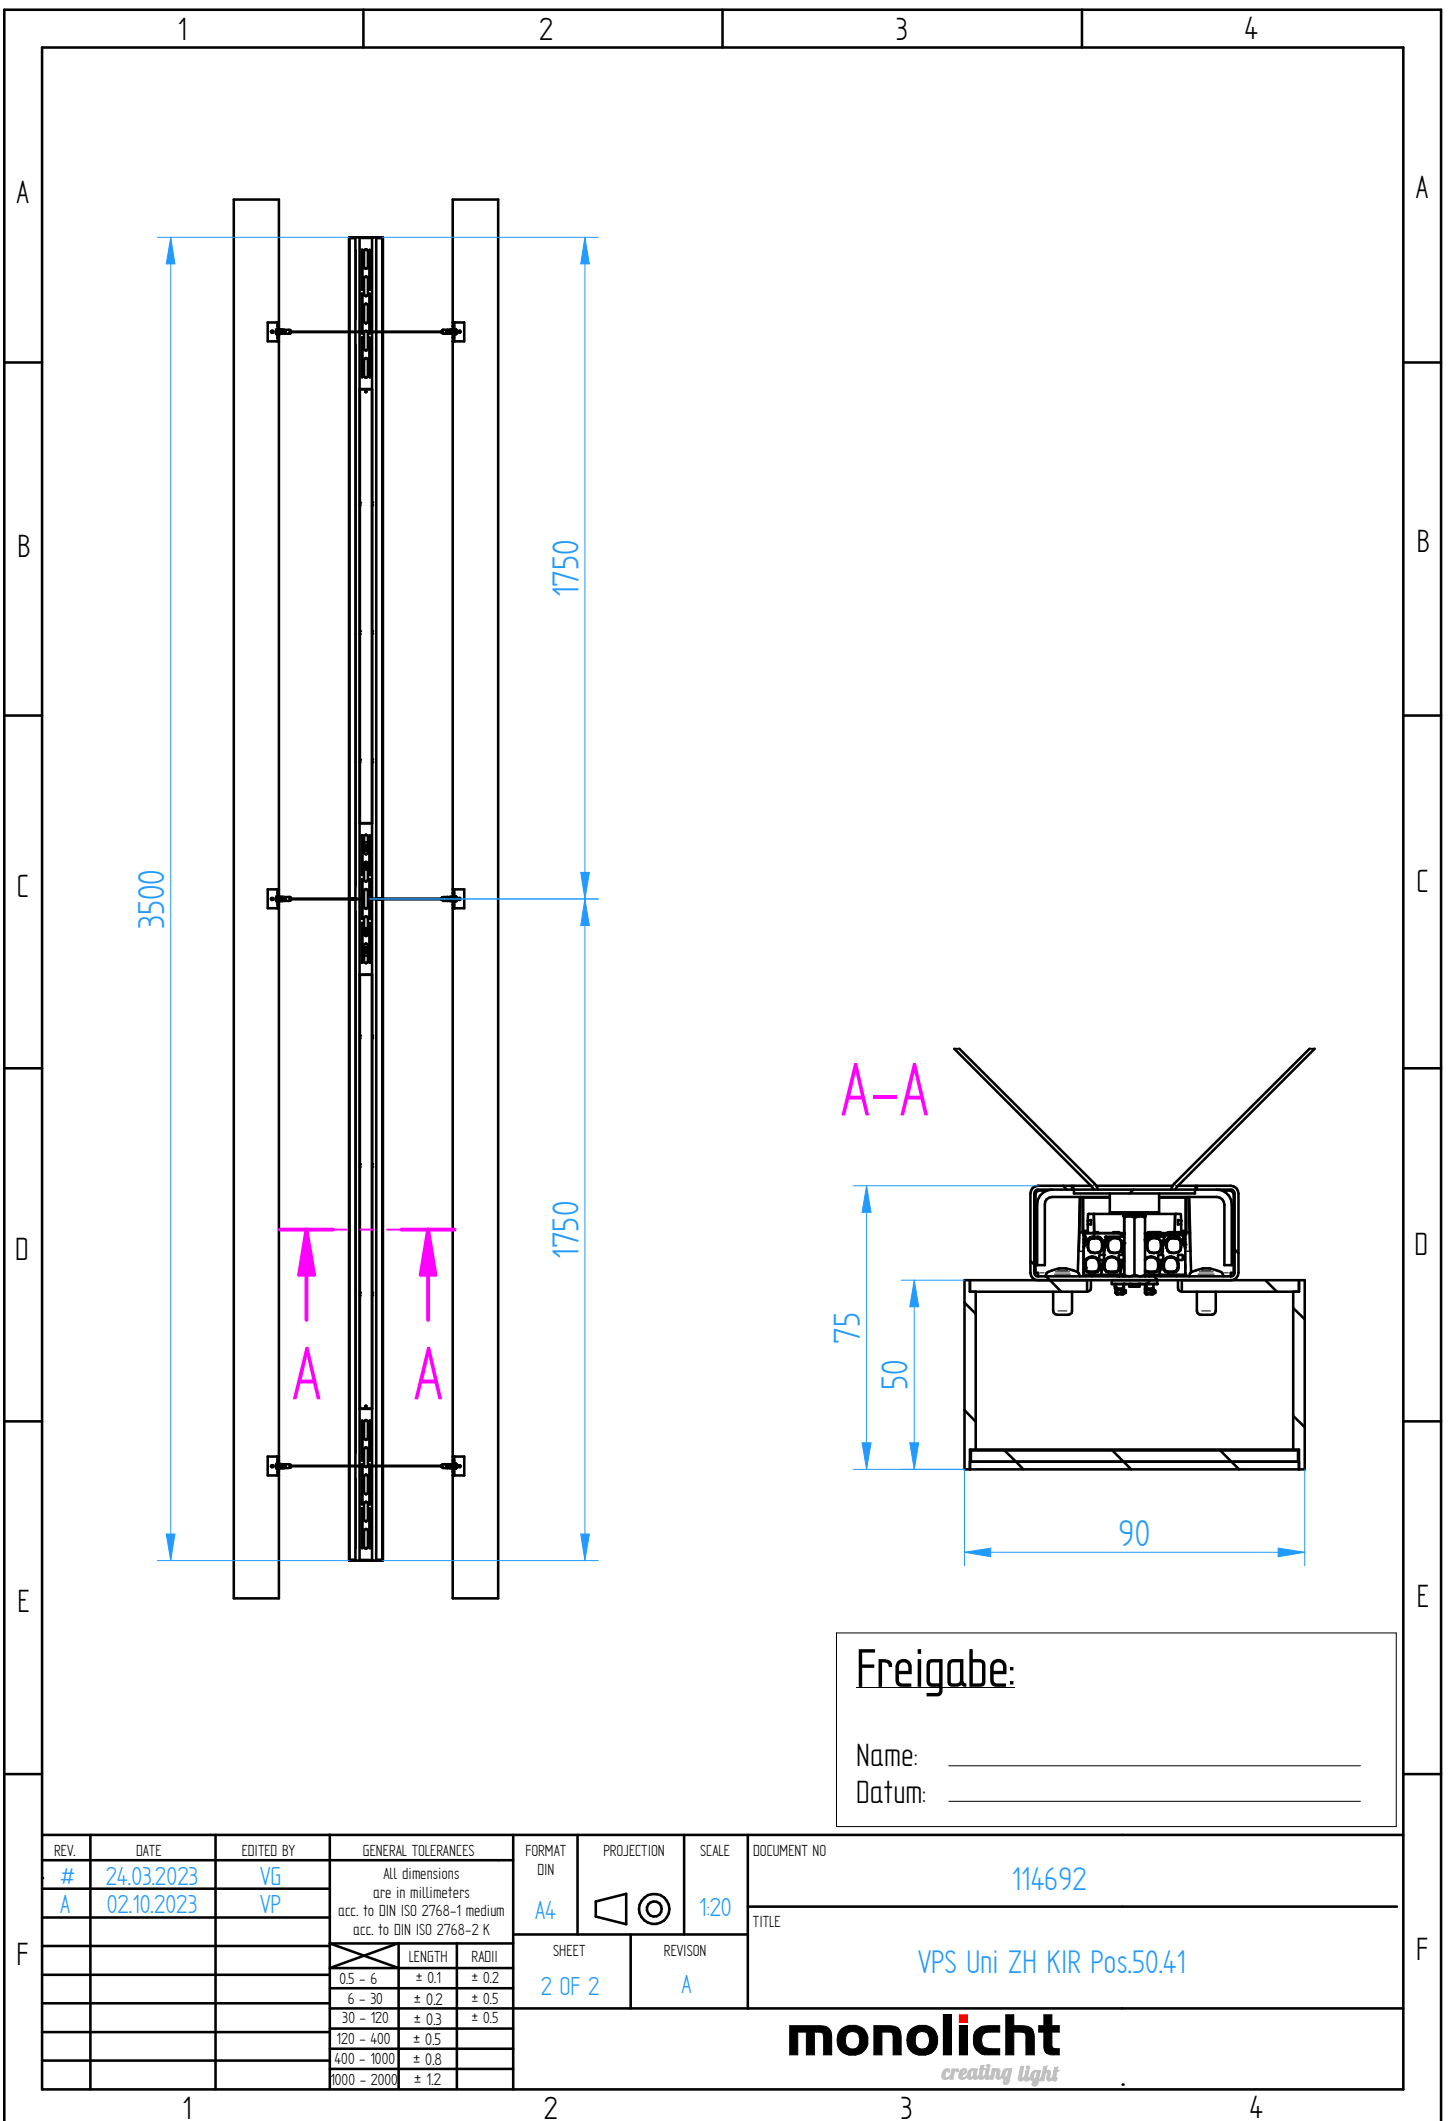

**Freigabe:**  
 Name: \_\_\_\_\_  
 Datum: \_\_\_\_\_

REV #	DATE 24.03.2023	EDITED BY VG	GENERAL TOLERANCES All dimensions are in millimeters acc. to DIN ISO 2768-1 medium acc. to DIN ISO 2768-2 K	FORMAT DIN A4	PROJECTION	SCALE 1:20	DOCUMENT NO 114692
A	02.10.2023	VP		SHEET 2 OF 2	REVISION A	TITLE VPS Uni ZH KIR Pos.50.41	
			LENGTH	RADII			
			0.5 - 6	± 0.1 ± 0.2			
			6 - 30	± 0.2 ± 0.5			
			30 - 120	± 0.3 ± 0.5			
			120 - 400	± 0.5			
			400 - 1000	± 0.8			
			1000 - 2000	± 1.2			

**monolicht**  
*creating light*