


For this drawing, we reserve all rights. They remain our intellectual property and may not be copied or made accessible to third parties without our express permission. Subject to change.

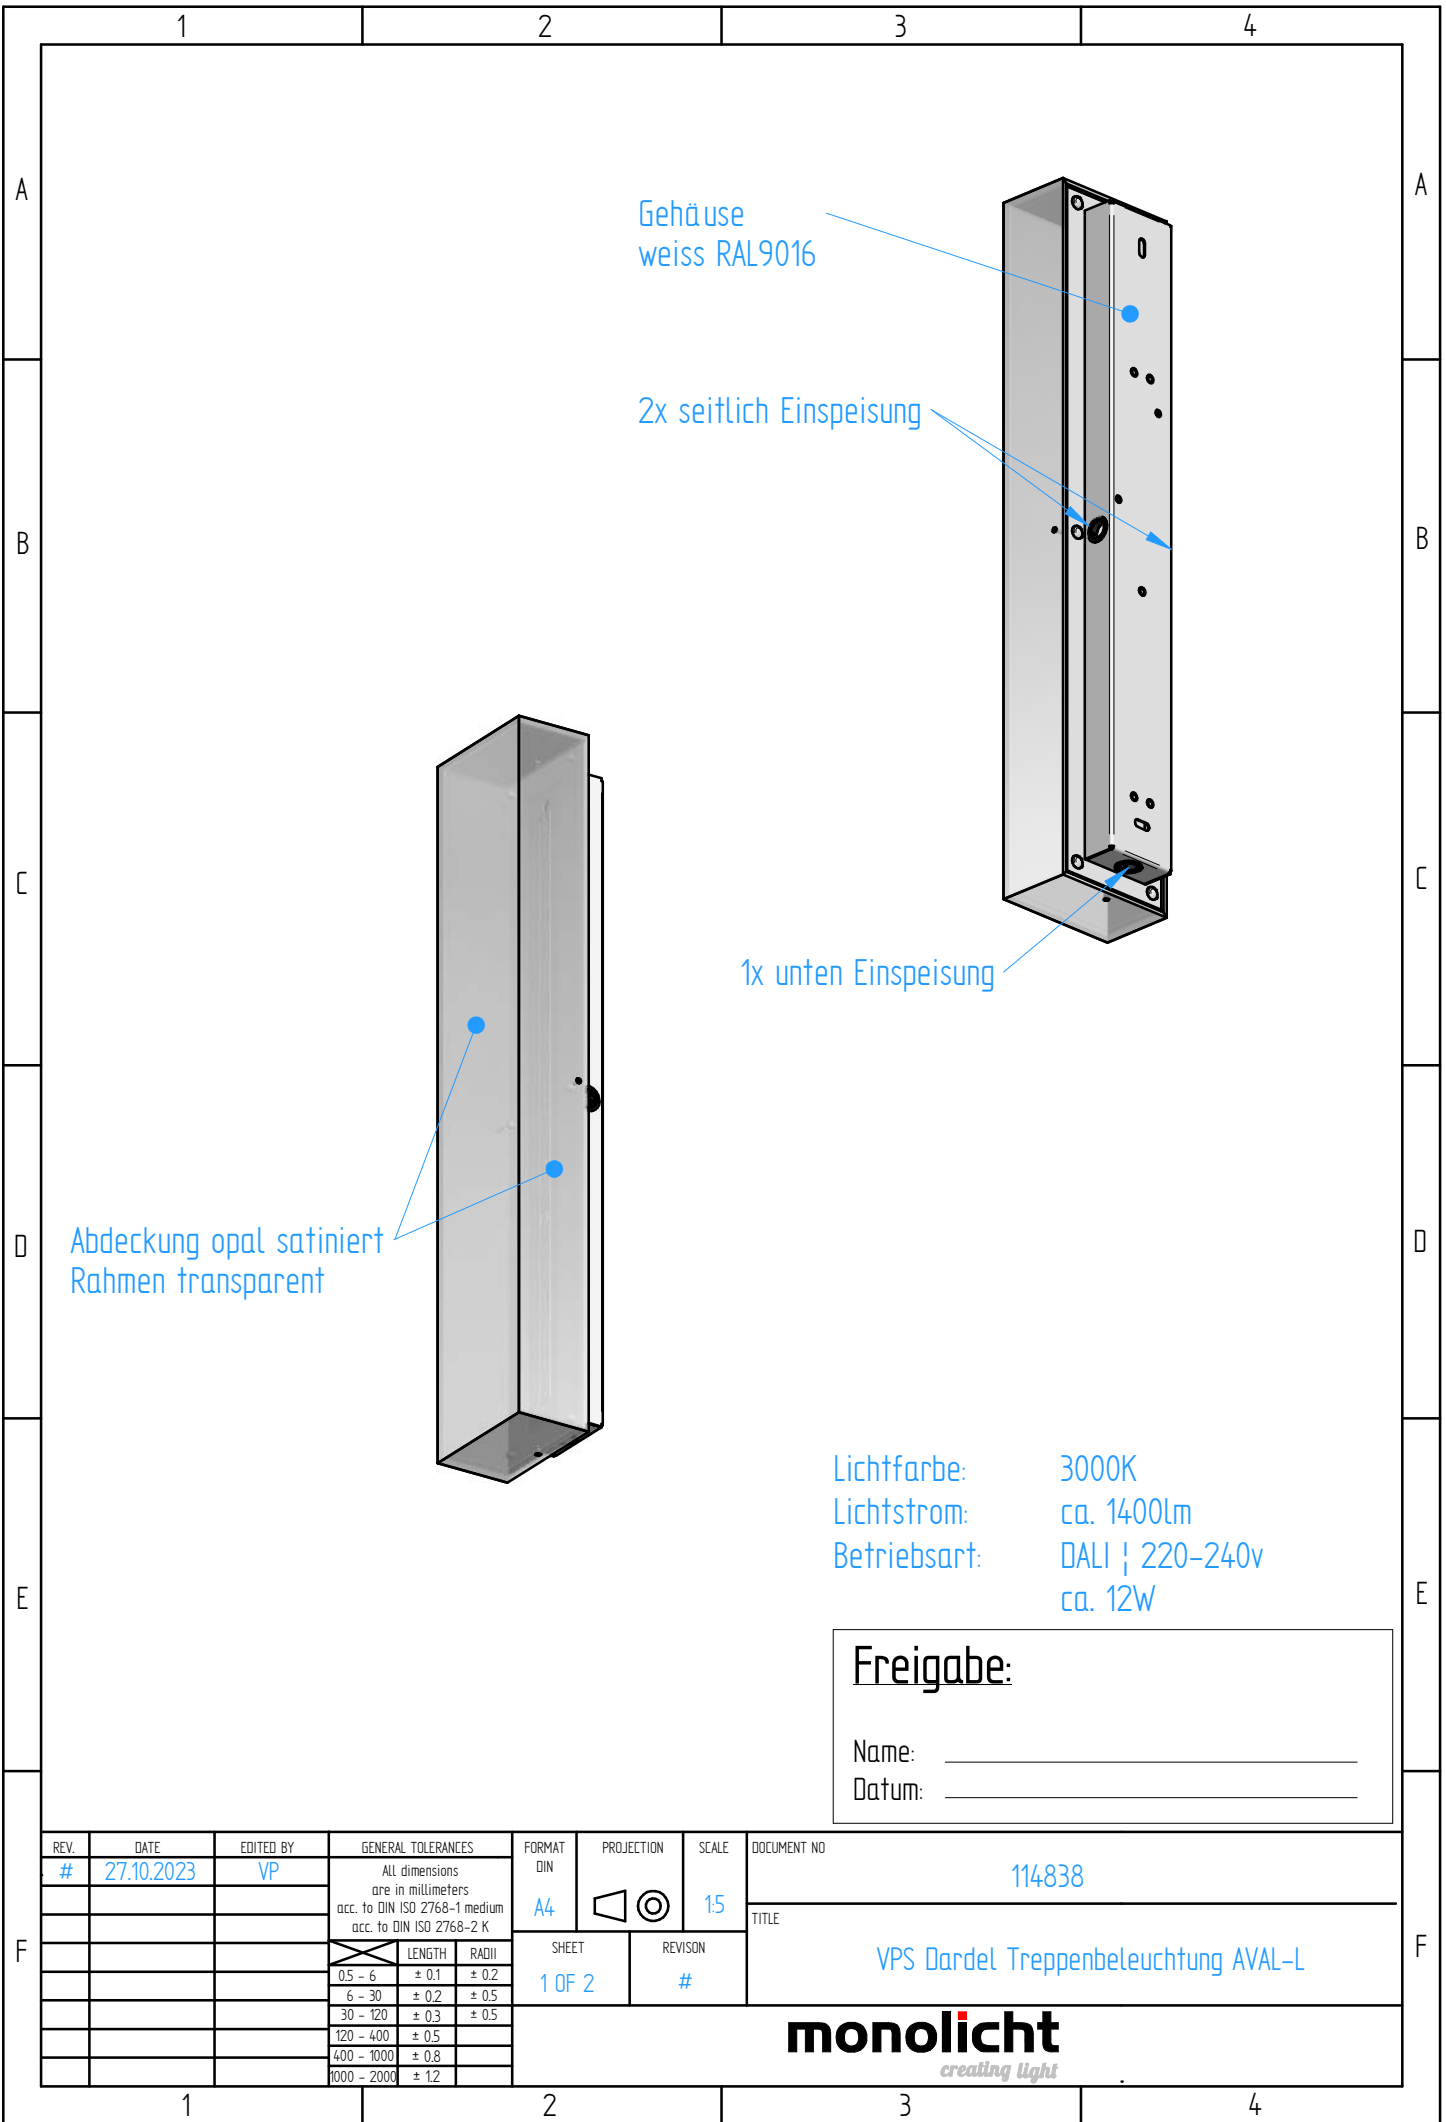

Lichtfarbe: 3000K  
 Lichtstrom: ca. 1400lm  
 Betriebsart: DALI | 220-240v  
 ca. 12W



**Freigabe:**

Name: \_\_\_\_\_

Datum: \_\_\_\_\_

REV.	DATE	EDITED BY	GENERAL TOLERANCES		FORMAT	PROJECTION	SCALE	DOCUMENT NO
#	27.10.2023	VP	All dimensions are in millimeters acc. to DIN ISO 2768-1 medium acc. to DIN ISO 2768-2 K		A4		1:5	114838
								TITLE
					SHEET	REVISION		VPS Dardel Treppenbeleuchtung AVAL-L
					1 OF 2	#		
					<b>monolicht</b> creating light			

For this drawing, we reserve all rights. They remain our intellectual property and may not be copied or made accessible to third parties without our express permission. Subject to change.

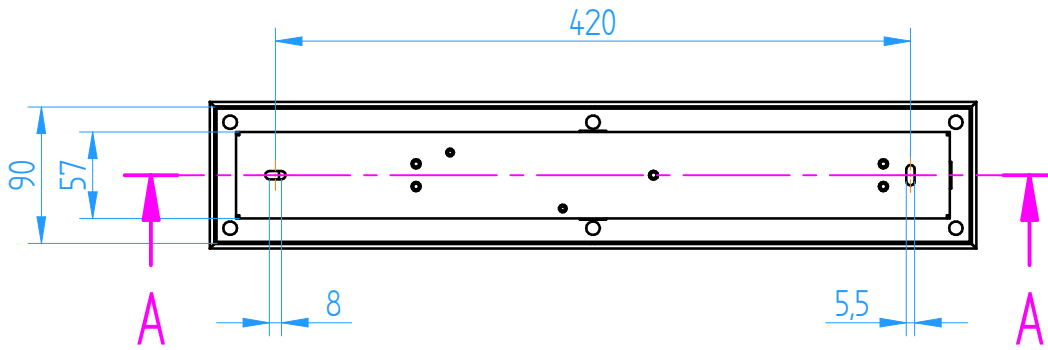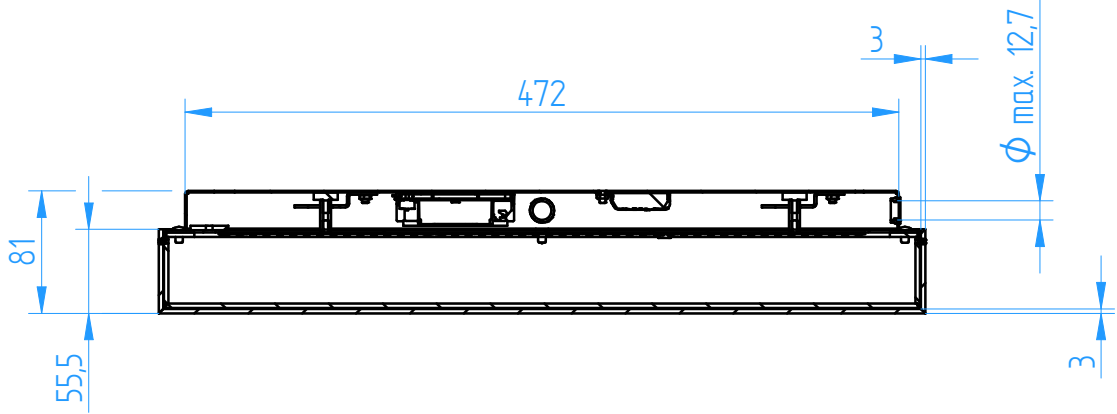

Freigabe:

Name: \_\_\_\_\_

Datum: \_\_\_\_\_

REV.	DATE	EDITED BY	GENERAL TOLERANCES	FORMAT	PROJECTION	SCALE	DOCUMENT NO
#	27.10.2023	VP	All dimensions are in millimeters acc. to DIN ISO 2768-1 medium acc. to DIN ISO 2768-2 K	A4		1:5	114838
				SHEET	REVISION		TITLE
			LENGTH	RADII	2 OF 2	#	VPS Dardel Treppenbeleuchtung AVAL-L
			0.5 - 6	± 0.1 ± 0.2			 <i>creating light</i>
			6 - 30	± 0.2 ± 0.5			
			30 - 120	± 0.3 ± 0.5			
			120 - 400	± 0.5			
			400 - 1000	± 0.8			
			1000 - 2000	± 1.2			